




18V LXT LITHIUM-ION CORDLESS AUTOFEED SCREWDRIVER

POWERFUL MAKITA BUILT 4-POLE MOTOR HANDLES DECKING AND SUB-FLOOR APPLICATIONS AT 4,000 RPM IN A COMPACT LIGHTWEIGHT DESIGN

Integrated Autofeed Design Makes the Tool Lighter, More Powerful and Compact than Other Brands

High Capacity Range: 1-3/4" To 2-15/16" Collated Screws


New Silent Clutch Design Uses Higher Durability Materials Increasing Operation Efficiency and Decreasing Driver Noise

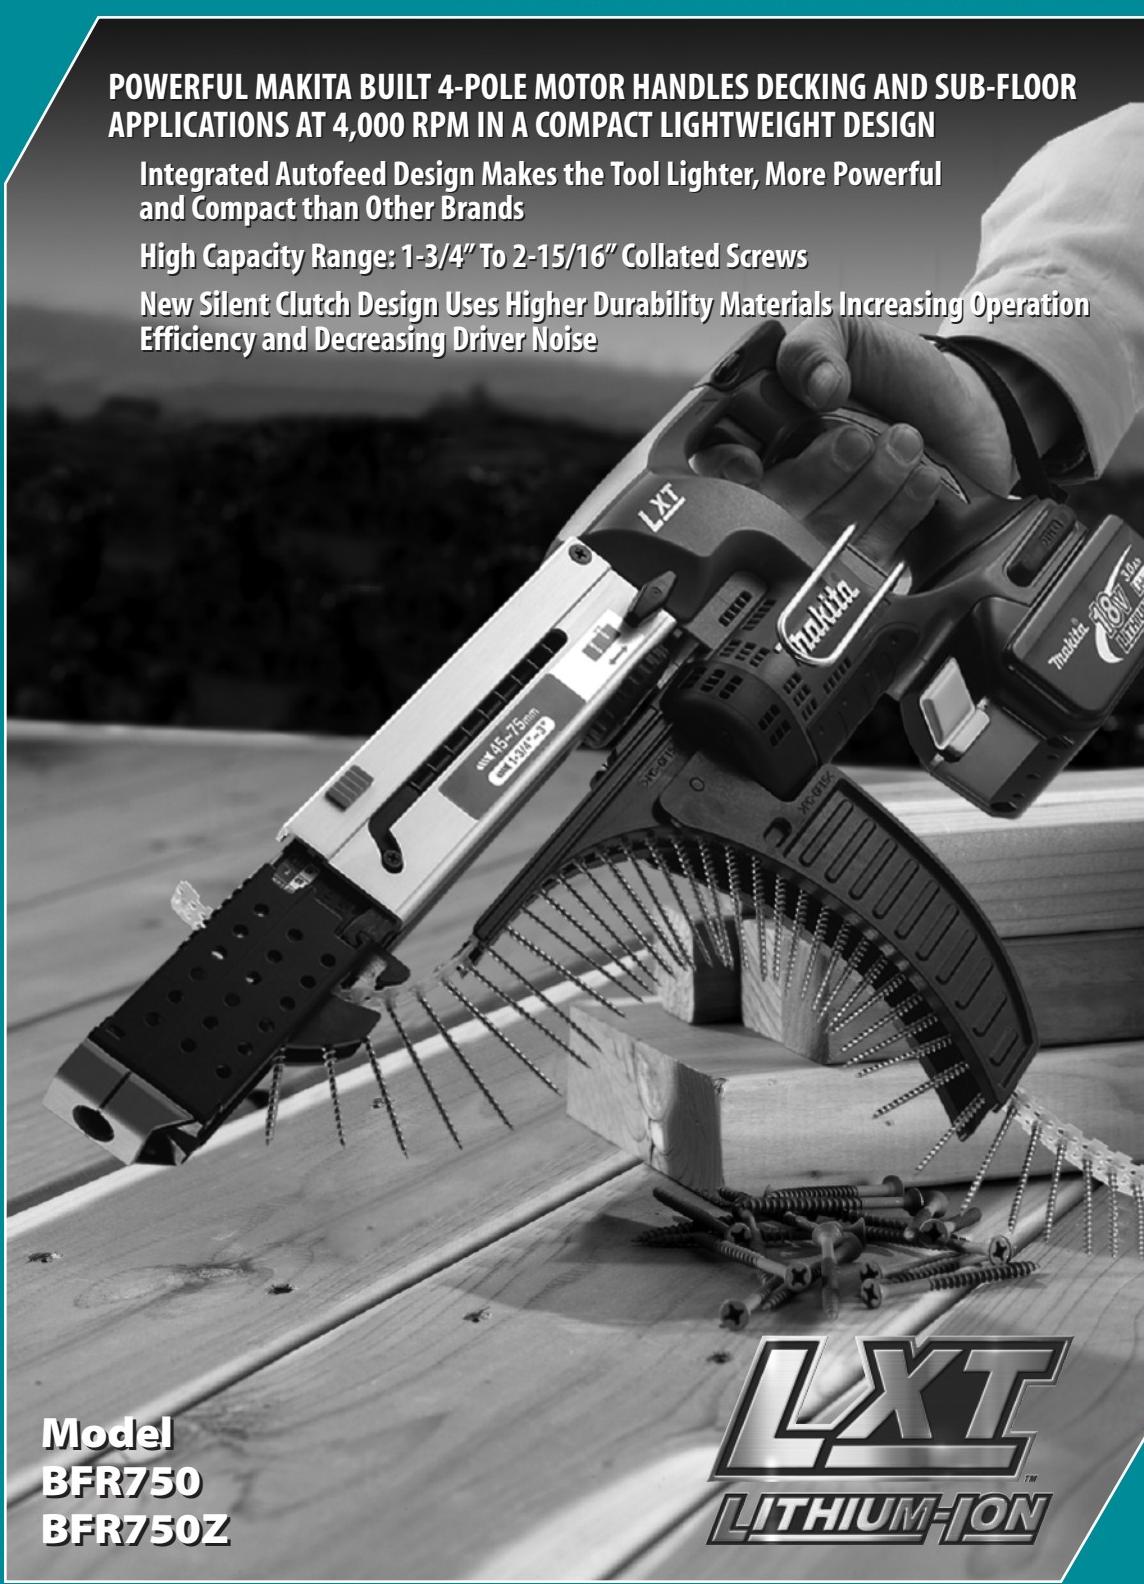

Model
BFR750
BFR750Z

LXT
LITHIUM-ION™

POWER




Powerful, high speed Makita built 4-pole motor handles decking and sub-floor (4,000 RPM)

CONVENIENCE



Collapsible screw guide reduces strip tangling and folds away for easy storage

CONTROL



Rugged dust-proof autofeed tool design with a silent clutch for easier operation

PERFORMANCE



LXT Li-Ion batteries charge in 30 minutes, run longer and deliver 2.5X more cycles than Ni-Cd

POWER AND SPEED

18V LXT LITHIUM-ION CORDLESS AUTOFEED SCREWDRIVER

Model BFR750/BFR750Z


FEATURES & BENEFITS

- Powerful Makita built 4-Pole motor handles decking and sub-floor applications at 4,000 RPM in a compact lightweight design
- Integrated autofeed design makes the tool lighter, more powerful and compact than other brands
- High capacity range: 1-3/4" to 2-15/16" collated screws
- Rugged aluminum dust-proof autofeed housing for smooth sliding action
- New silent clutch design uses higher durability materials increasing operation efficiency and decreasing driver noise
- Screw guide prevents screw strip tangling and can fold against the autofeed housing for storing and carrying
- Tool belt hook can be moved to either side of the tool
- Ergonomic shape fits like a glove with even pressure and easy control
- Makita Lithium-Ion provides longer run time, 5x lower self-discharge (for use any time) & 16 firm holding contact terminals (for constant high power)
- 30-Minute rapid optimum charger communicates with the battery's built-in chip throughout the charging process to optimize battery life by actively controlling current, voltage and temperature
- 30-Minute rapid optimum charger has a built-in fan to cool the battery to produce more lifetime work
- 3-year warranty on tool and 1-year warranty on battery and charger



STANDARD EQUIPMENT

- 2 ea. 18V LXT Lithium-Ion 3.0Ah battery (BL1830)
 - 30-Minute rapid optimum charger (DC18RA)
 - Contractor bag (821007-X)
 - Belt hook (281220-7)*
 - Plastic battery cover (450128-8)
 - 2 ea. 7-1/8" Philips #2 power bit (784253-6)*
- Model BFR750Z (tool only) - battery, charger and bag not included
* Included as standard equipment for BFR750Z

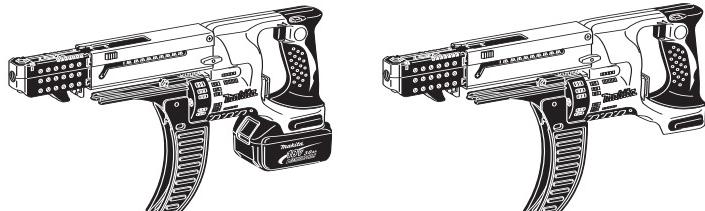

SPECIFICATIONS

Collated screw capacity	1-3/4" to 2-15/16"
Bit shank	1/4" Hex
No load speed	4,000 RPM
Battery	18VDC (3.0Ah)
Overall length	10-1/8"
Net weight	5.0 lbs. (w/ battery)
Shipping weight (BFR750)	13.0 lbs.
(BFR750Z)	4.4 lbs.
Master carton qty.	1
UPC Codes:	(BFR750) 088381-082143 (BFR750Z) 088381-082136



OPTIONAL ACCESSORIES

- Autofeed assembly (784647-5)
- Optimum automotive charger (DC18SE)



Makita offers a wide variety of AUTOFEED SCREWDRIVER accessories. For a complete listing, please refer to the Makita General Catalog, or visit our website at makitatools.com, or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.
NTF-0508-2.5M MA-0458-08 For more information, call 1-800-4MAKITA or visit makitatools.com

Makita
Makita U.S.A., 14930 Northam St., La Mirada, CA 90638